# Mutriku wave power

## Unpacking the full life-cycle footprint of breakwater wave energy

Name: Jubair Ibn Omar Hamza  Student ID: 760075852  Email: jh1868@exeter.ac.uk  MSc Renewable Energy Engineering  ENEM101

Scan for the portfolio →
linkedin.com/in/jubair-hamza

Mutriku integrates oscillating water columns into a harbour breakwater in northern Spain. It combines electricity generation with turbine testing [1,4]. This case analyses Mutriku's environmental impacts across its full life cycle, asks how adverse effects can be reduced and whether improving output can justify the burdens of building, operating and retiring the plant.

### How oscillating water column technology evolved

Sources: [7,8]

**1910** — Bochaux Praceique builds the believed first oscillating water column (OWC)

**1940s** — Masuda develops a wave-powered navigation buoy

**Late 1970s** — Wells turbine invented: airflow both ways, no rectifying valves needed

**1985** — Toftestallen, Norway: shoreline OWC prototype

**1999–2000** — Pico (Azores) and LIMPET (Scotland) plants; LIMPET ran over 10 years

**2011** — **Grid connection: 16 chambers × 18.5 kW (296 kW) [1,14]**

**Mutriku integrates the OWC into a breakwater, so one structure also protects the harbour.**


### Did you know?

**Europe's first:** EVE describes Mutriku as the first commercial plant in Europe to generate electricity from waves [13].

**Longest-running:** EVE reports more operating hours since 2011 than any other wave plant of its kind [13].

**Open to visitors:** the plant is part of the tourist offer of the UNESCO-recognised Basque Coast Geopark [14].

## 01 How it works

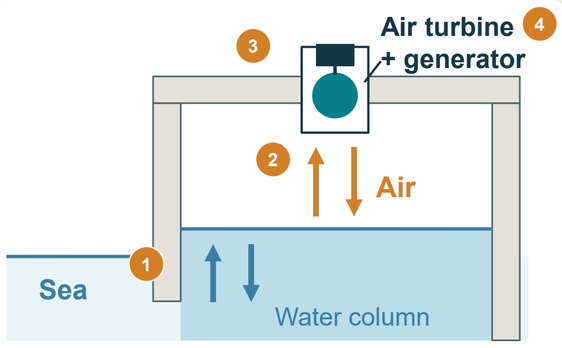


1. Wave lifts the water column
2. Air is pushed through the turbine
3. Wells turbine keeps turning one way
4. Generator makes electricity

**16 × 18.5 kW = 296 kW [1,14]**

Simplified section, not to scale. Arrows show alternating motion. Diagram based on [1].

## 02 Where it sits: location and settings



Photo: Txo (2026), Wikimedia Commons, CC0 1.0 [19]

**Location:** inside the harbour breakwater at Mutriku, on the Basque coast of northern Spain.

**Why there:** built into the breakwater, one structure shares harbour protection, port use and electricity generation [1,11]. The BiMEP Mutriku area also hosts turbine testing [4,9].

## 03 Where the carbon burden sits

**226** g $CO_2$e/kWh — Life-cycle total, 20-year model [1]

? Dismantling emissions not quantified (set to 0)





- Construction 86.6%
- Operation & maintenance 5.5%
- End of life 7.9%

Secondary inventories | Staff data | Dismantling set to 0 (no data)

Rounded stages sum to 225.3 vs 226 reported [1]. Model: 20 years, 4.93 GWh [1].

Construction dominates, so material demand is the priority. The model includes breakwater construction but excludes its maintenance [1]. Mutriku emits 53–94% more greenhouse gas than the other ocean devices compared in [1].

## 04 Output: forecast and evidence

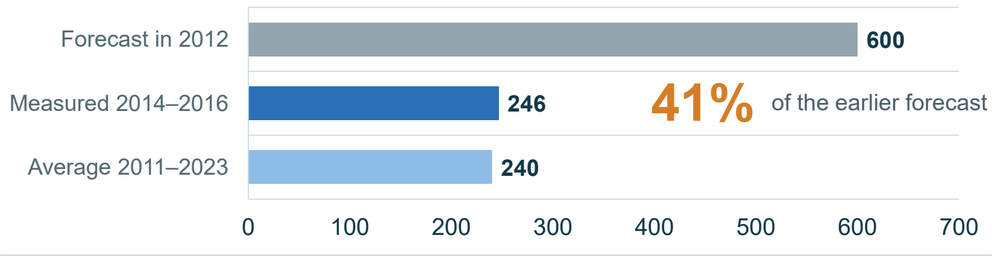


MWh/year [2,3]. Average: over 3 GWh [13,14] ÷ 12.5 years (own calculation).

**About 10 of the 14 turbines analysed working on average [2]**

Cumulative generation reached 1 GWh in 2016 and 2 GWh in 2020 [17], then over 3 GWh by the end of 2023 [13,14], so the gap persists.


### Beyond carbon: the wider footprint

▲ Favourable ▼ Adverse – Neutral

- ▼ Construction noise was heard 3–10 km away and worried locals [10]; one month of 2022 operating noise monitoring (one of three hydrophones failed) found no plant contribution to the soundscape [18]
- – Breakwater may alter sediment and flow; the OWC adds no significant change [10]
- ▲ Turbines sit in the air, not the sea [11]; plant sits on the breakwater, not the seabed [12]
- ▼ Salt exposure and splashing still cause corrosion and equipment failures [15]
- ▼ Most other LCA categories (e.g. marine ecotoxicity) are also driven by construction [1]
- ▼ Construction used about 12.9 kt of concrete and 21.3 kt of limestone [1]

## 05 Energy payback

| | | |
|---|---|---|
| Model life | | 20 years |
| Payback | +6.2 | 26.2 years |

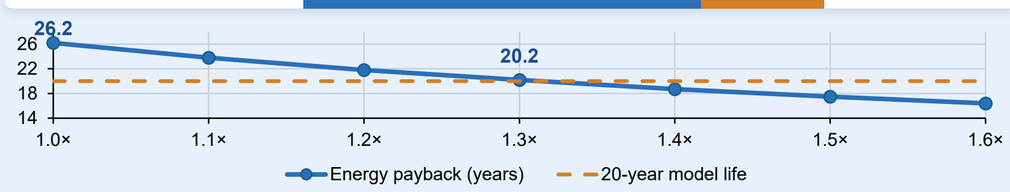


**Extend service life** | **Raise net output** | **Use less material**

Break-even: about 31% more output (26.2 ÷ 20 = 1.31) or about 26 years' life. [1] quotes 8 years for solar PV and 1.5 for wind. Curve: own calculation from [1].

## 06 Impacts, trade-offs and mitigation

| | Environment | Society |
|---|---|---|
| **Build** | ▼ 195 g $CO_2$e/kWh [1]; hard-bottom habitat site, effects not assessed [1,10] ● | ▼ Construction noise concerned local residents [10] ● |
| **Operate** | ▲ Low emissions: 12.4 g $CO_2$e/kWh [1] ●<br>▲ No significant acoustic impact in 2016 [10]; no formal complaints in 13 years [14] ●<br>▼ Near-field sound and species effects unresolved; no rise seen ~1 km away [5,10] ● | ▲ Electricity [1,14], turbine-testing access [4,9], harbour protection [11] ●<br>▲ Visitor interest suggests a local benefit [3,14] ●<br>▼ Public cost: €6.7M project, €2.3M for the energy plant [16] ● |
| **Retire** | ? Habitat effects of removal not assessed; dismantling emissions modelled as zero [1] ●<br>▲ Steel recycling cuts metal depletion; more recycling is not always better overall [1] ● | ? Social effects of closure (e.g. jobs) not assessed; acceptance data date from 2013 [6] ● |
| **Fix** | **Cut virgin materials** \| **Verify marine durability** \| **Upgrade turbines [4]** \| **Compare end-of-life options** | **Coordinate work schedules** \| **Track output and complaints** \| **Residents shape decisions [5,6]** |

● Modelled ● Source-reported ● Unsourced or unresolved

### Community milestones

Selected milestones, not a time-scaled axis.

- Jul 2011 – Plant opens [3]
- Dec 2011 – Storm shutdown [3]
- Mar 2012 – Operation resumes [3]
- 2013 – Social study [6]
- 2025 – SafeWAVE paper [5]

## Conclusions and Recommendations

### Key findings

1. **Construction dominates:** 86.6% of the 226 g $CO_2$e/kWh total, and the largest share in all nine LCA categories [1].
2. **Payback exceeds service life:** 26.2 years against a 20-year model life; output was ~41% of forecast [1–3].
3. **Evidence is incomplete:** dismantling emissions assumed to be zero for lack of data [1]; social evidence is dated [6].

### Key judgement

Wave electricity alone does not make Mutriku sustainable: output would need to rise ~31%, or life extend to ~26 years, just to repay its embodied energy. Only lower material use, higher output or longer life, with full life-cycle accounting and fair sharing of burdens, can justify it.

**1 Upgrade within the existing structure** → **2 Compare equivalent alternatives** → **3 Test lifetime, downtime, recycling** → **4 Approve only with full accounting** → **5 Publish monitoring; revisit**

### References (IEEE)

[1] R. León Lira, L. Güereca and J. Lekube, "Life cycle assessment of wave energy: The Mutriku case study," *J. Ocean Eng. Mar. Energy*, vol. 12, no. 3, pp. 1525–1542, 2026, doi: 10.1007/s40722-026-00487-0.

[2] G. Ibarra-Berastegi, J. Sáenz, A. Ulazia, P. Serras, G. Esnaola and C. García-Soto, "Electricity production, capacity factor, and plant efficiency index at the Mutriku wave farm (2014–2016)," *Ocean Eng.*, vol. 147, pp. 20–29, 2018, doi: 10.1016/j.oceaneng.2017.10.018.

[3] Basque Government, "La planta de Mutriku, primera comercial europea que genera energía con las olas, ha producido en un año 200.000 kWh," Irekia, Aug. 2012 (in Spanish). [Online]. Available: irekia.euskadi.eus. Accessed: Oct. 26, 2026.

[4] L. Gato et al., "Sea trial results of the biradial and Wells turbines at Mutriku wave power plant," *Energy Convers. Manag.*, vol. 268, Art. no. 115936, 2022, doi: 10.1016/j.enconman.2022.115936.

[5] J. Bald et al., "The contribution of the SafeWAVE EU project to the future development of ocean energy," *Int. Mar. Energy J.*, vol. 8, pp. 73–82, 2025, doi: 10.36688/imej.8.73-82.

[6] I. Heras-Saizarbitoria, I. Zamanillo and I. Laskurain, "Social acceptance of ocean wave energy: A case study of an OWC shoreline plant," *Renew. Sustain. Energy Rev.*, vol. 27, pp. 515–524, 2013, doi: 10.1016/j.rser.2013.07.032.

[7] L. Johanning, "The fascinating history of wave energy," WEDUSEA, Jun. 3, 2025. [Online]. Available: wedusea.eu/the-fascinating-history-of-wave-energy/. Accessed: Oct. 20, 2026.

[8] IEA-OES, "First generation devices," Ocean Energy Systems, n.d. [Online]. Available: ocean-energy-systems.org/what-is-ocean-energy/waves/first-generation-devices/. Accessed: Oct. 20, 2026.

[9] International WaTERS, "Mutriku Area," European Marine Energy Centre and Ocean Energy Systems, n.d. [Online]. Available: internationalwaters.info/mutriku-area. Accessed: Oct. 26, 2026.

[10] Tethys, "Mutriku Wave Power Plant," Tethys Knowledge Base, n.d. [Online]. Available: tethys.pnnl.gov/project-sites/mutriku-wave-power-plant. Accessed: Oct. 30, 2026.

[11] L. Frayer, "Spain expands renewables with wave-powered electricity plant," NPR, Nov. 26, 2012. [Online]. Available: wfae.org/2012-11-26/spain-expands-renewables-with-wave-powered-electricity-plant. Accessed: Oct. 30, 2026.

[12] I. Muxika, P. Vinagre and J. Bald, "Deliverable 2.4: Monitoring of seafloor integrity," WESE project, Nov. 30, 2020. [Online]. Available: tethys.pnnl.gov/publications/wese-deliverable-24-monitoring-seafloor-integrity. Accessed: Oct. 30, 2026.

[13] EVE, "The Mutriku wave plant achieves cumulative electricity production of three million kilowatts per hour," Jan. 11, 2024. [Online]. Available: eve.eus/en/?p=5857. Accessed: Oct. 25, 2026.

[14] Interreg Europe, "BIMEP (Mutriku): World's first breakwater wave power plant: acceptance of the community," Mar. 6, 2024. [Online]. Available: interregeurope.eu/good-practices. Accessed: Oct. 25, 2026.

[15] J. Lopez-Mendia, A. Aristondo, P. Ricci, J. Lekube, S. Ceballos and E. Robles, "Improving the power production of Mutriku Wave Power Plant throughout tuning the actual generator and damping valve limits," *Ocean Eng.*, vol. 315, Art. no. 119917, 2025, doi: 10.1016/j.oceaneng.2024.119917.

[16] Basque Government, "Euskadi dispone ya de la primera planta europea que suministra energía a través de las olas," Irekia, Jul. 7, 2011 (in Spanish). [Online]. Available: irekia.euskadi.eus. Accessed: Oct. 29, 2026.

[17] Offshore Energy, "Mutriku wave plant hits 2GWh mark," Offshore Energy, Feb. 24, 2020. [Online]. Available: offshore-energy.biz/2020/02/24/mutriku-wave-plant-hits-2gwh-mark. Accessed: Oct. 30, 2026.

[18] E. Le Bourhis et al., "Deliverable 2.6: Data results and analysis towards impacts' evaluation," SafeWAVE project, Dec. 17, 2024. [Online]. Available: tethys.pnnl.gov/sites/default/files/publications/Bourhis_etal_2024.pdf. Accessed: Oct. 30, 2026.

[19] Txo, "Motrico, vista del nuevo muelle de abrigo del puerto," Wikimedia Commons, Aug. 22, 2026, CC0 1.0. [Online]. Available: commons.wikimedia.org/wiki/File:Motrico,_vista_del_nuevo_muelle_de_abrigo_del_puerto.jpg. Accessed: Nov. 1, 2026.